
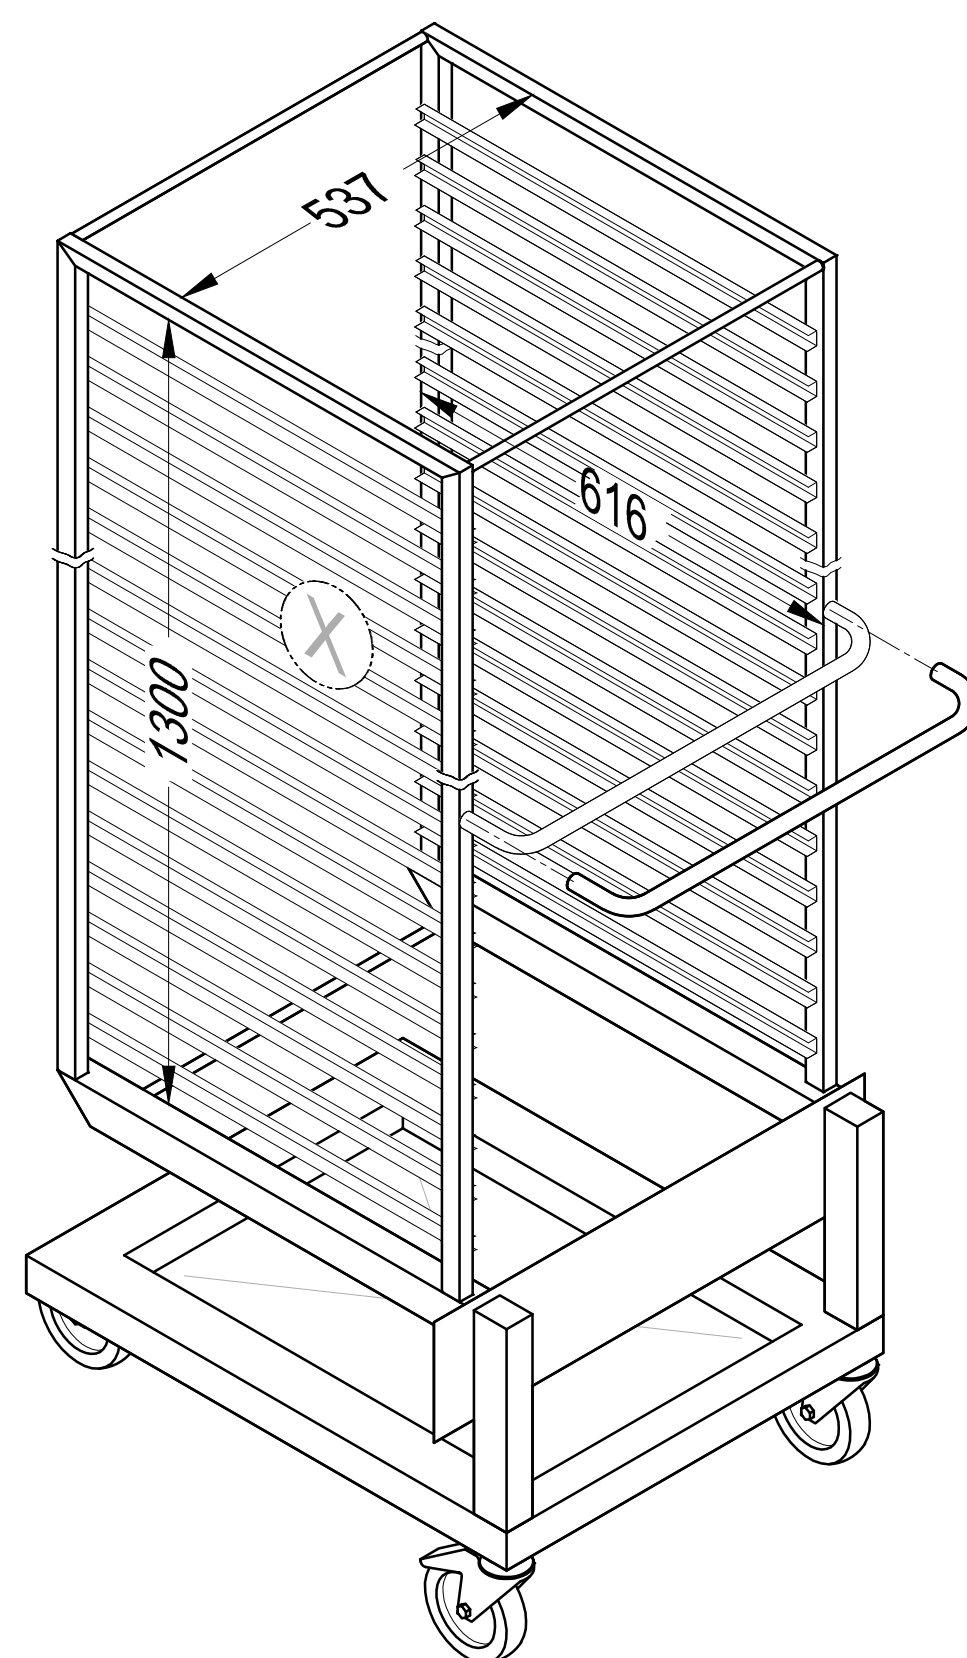
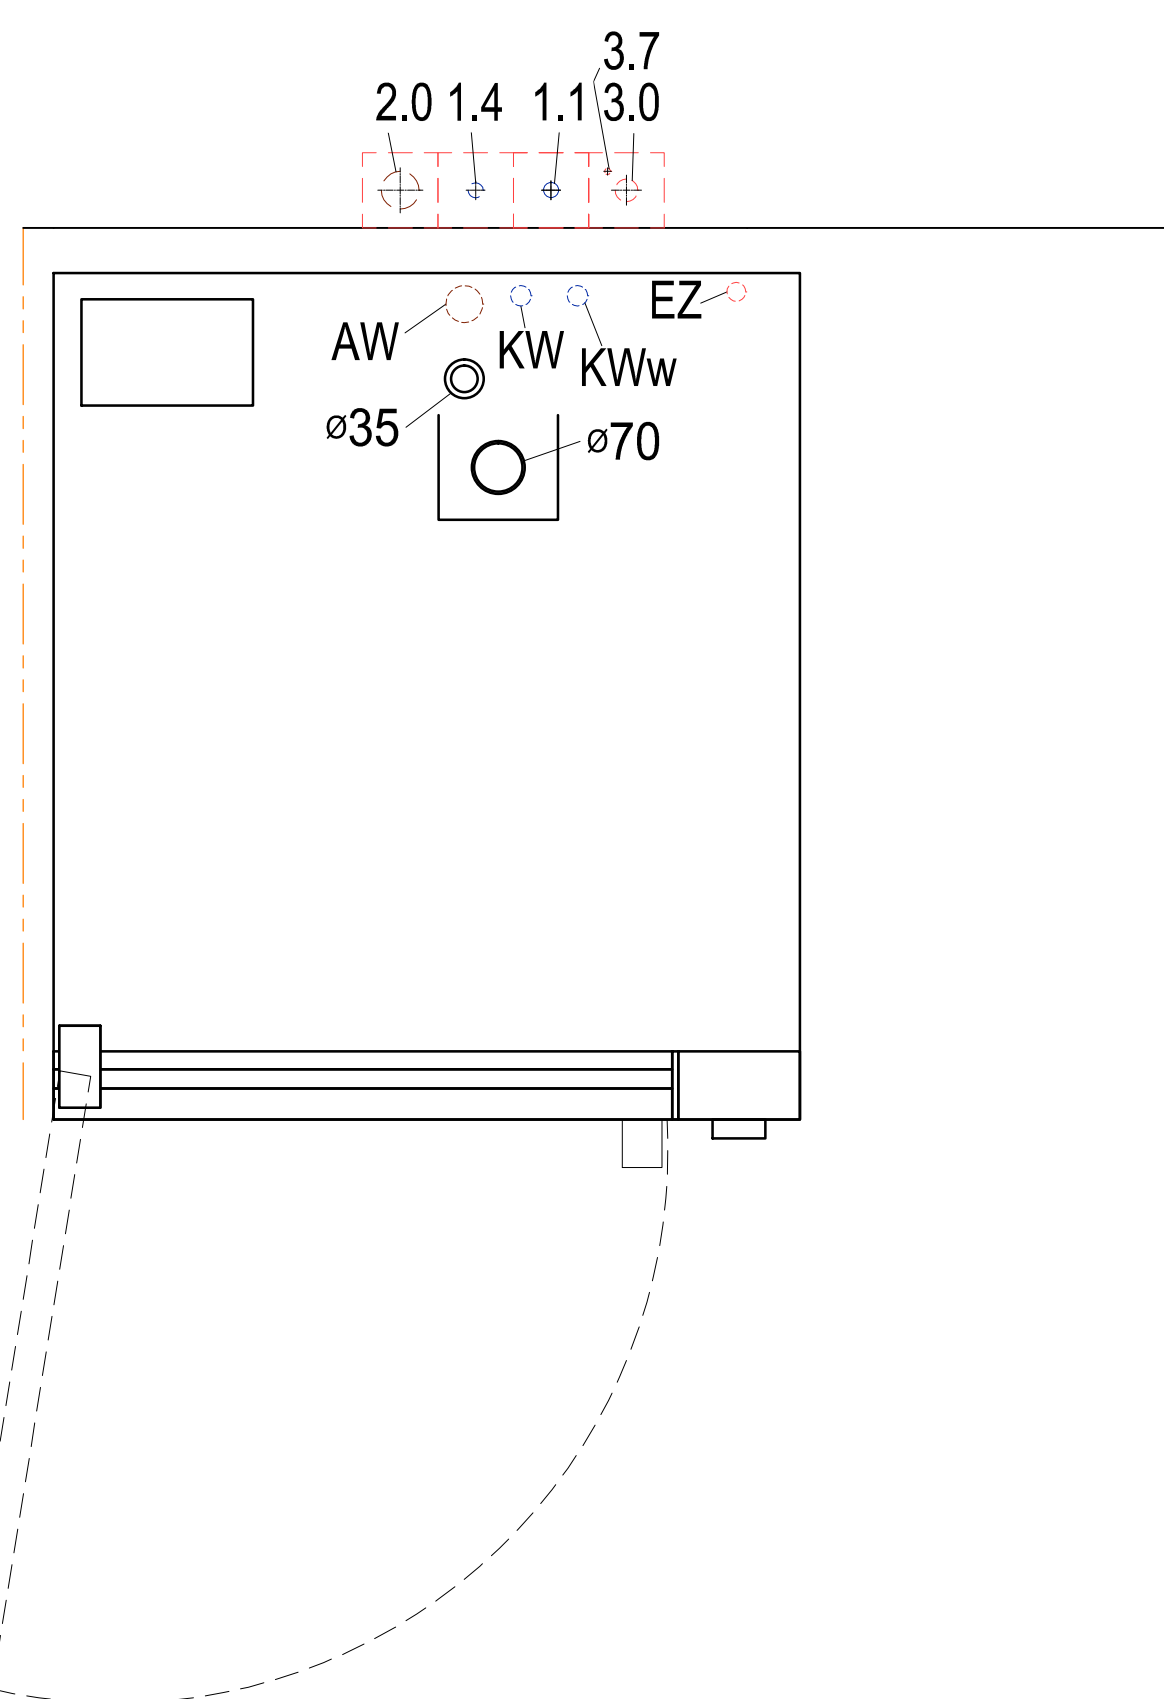


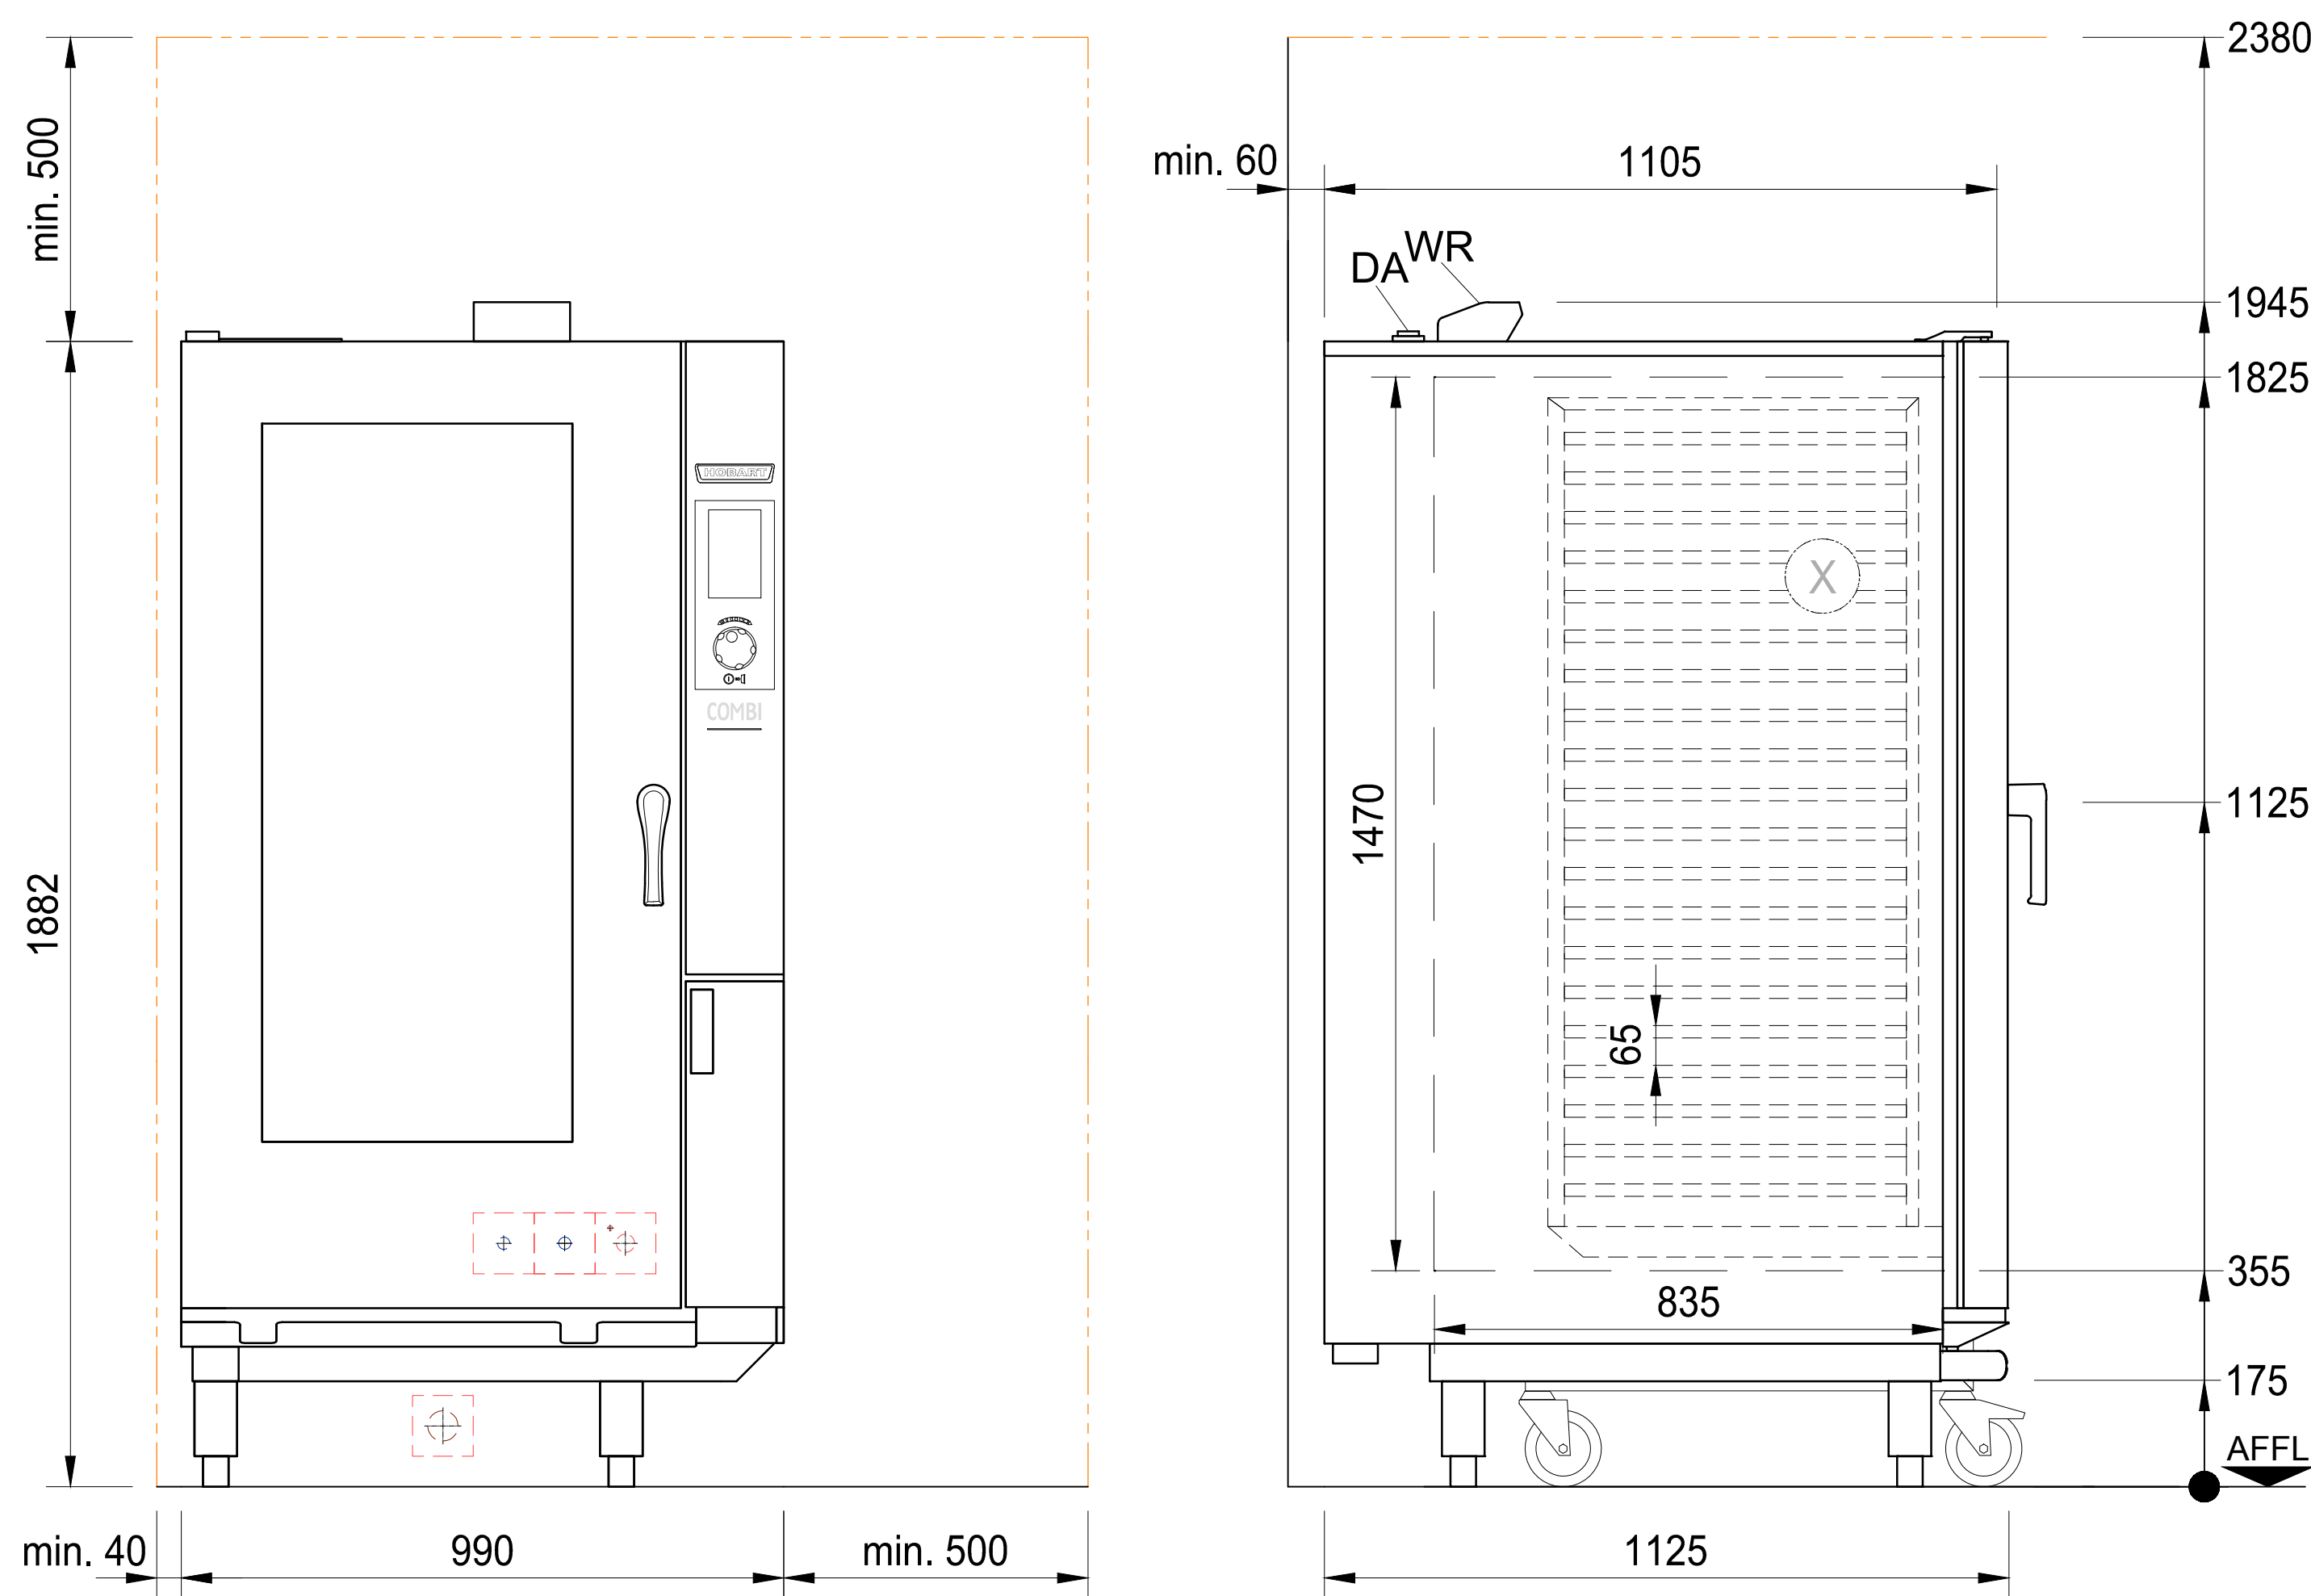

HOBART

GENERAL LEGEND

AW	= drain water	KW	= cold water	üOKFF	= above finished floor
Dat	= dataline	KWw	= cold water soft	SFB	= separate filling-boiler
EZ	= power line (supply)	LR	= conduit Ø	VEW	= demineralized water
FD	= floor opening	CNS	= stainless steel (inox)	WD	= wall opening
HW-VL	= hot water flow	MK	= supply channell	WS	= wall slot
HW-RL	= hot water return	PA	= equipotential conductor	WW	= warm water
KB	= cored hole Ø	STL	= control line	WWw	= warm water soft

HOBART



GENERAL INFORMATION



Connections: The connection of the convection steamer to all services (e.g. electrical, water, drain, exhaust) must comply with all national and local codes of practice and must be carried out by qualified people.

Dimensions: Dimensions in the drawing are finished dimensions in Millimeters.

Transport: Minimum measurements of entry doors = outer largest dimension of machine height + 300mm; machine width + 400mm!

Shut-off valves: The Shut-off valves for the convection steamer must be provided by the customer.

Floor drain: Splash floor drains should be installed for machine cleaning and for general cleaning purpose.

Ventilation: The ventilation and exhaust for the room must be according to VDI 2052. Radiated heat emissions must be considered.

Installation: Installation in accordance to DIN EN 61770.

Machine-Type:					Convection Steamer COMBI			Heating: Electrical										
Model:					HEJ 202 E			Operation: Right										
Capacity:					20GN 2/1		Inner Space:		450 dm³		Main-Switch: by others							
required supply (by others) (all installations according to local regulations) (technical feasibility must be checked on site)																		
Electrical	Voltage		Frequency		Structure		Fuse		Total Load		Location							
3.7	PA	Equipotential								400mm AFFL								
3.0	EZ	400 V	50 Hz		3-N-PE		3 x 100 A		54,7 kW		400mm AFFL							
Water	Consumption		Temp.		Chloride / Chlorine		Hardness		Conductance		Dimension		Connection		Location			
2.0	AW		Drain Approx. 80°C (Siphon provided by customer)										DN50		Drain pipe		100mm AFFL	
1.4	KW		min. 10l/min		max. 23°C		CL ⁻ max. 100mg/l		0-3,76°e (0,5mmol/l)		min. 20µS/cm		DN20		G ¾ male		400mm AFFL	
1.1	KWw						Cl ₂ max. 0,2mg/l											
Water treatment: Generally we recommend the use of the demineralisation HYDROLINE STEAM CD at> 3°d																		
Flow-Pressure provided min. 1,5 bar / 21,7 psi - max. 6,0 bar / 87,0 psi (above 6,0 bar must be lowered with a pressure reducer, below 1,5 bar need collutting with service)																		
machine-side connenctions and data																		
WR = vapors exit / Location: upper edge machine								DA = Steam exit / Location: upper edge machine										
EZ = Power input / Location: lower edge machine					AW = Drain / Location: lower edge machine					KWw/KW / Location: lower edge machine								
Heat-Radiation (thermal output to the room)																		
latent:					9,8 kW					sensibel: 6,6 kW								
-																		
Index Änderungen / Changes												Datum / Date		Name				
Das Urheberrecht an dieser Zeichnung verbleibt bei der HOBART GmbH. Jede nicht von uns schriftlich genehmigte Benutzung, Verfielfältigung, Überlassung an Dritte ist strafbar und macht schadensersatzpflichtig. This documnet contains proprietary and confidential data of HOBART GmbH. No disclosure, reproduction or use of any part there of may be made without written permission of HOBART GmbH.																		