

HOBART


WAREWASHING
GLASSWASHERS **GP**



PREMAX **GP**



The premium model with integrated drying provides a perfect drying result. It is the ideal solution for bars and counter areas, as no steam escapes when the door is opened. Rack size 500 x 500 mm, installation height 825 mm.

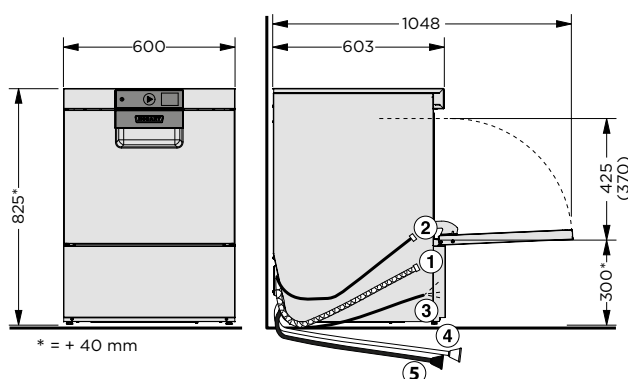

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener) - 10 bar
Max. supply water temperature	60 °C
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

TECHNICAL DATA

Cycle times*	60 / 90 / 120 sec. and special cycles
Water consumption	2 l/rack
Tank capacity	10.6 l
Tank heating	1.7 kW
Power supply	400 / 50 / 3N (230 / 50 / 1)

BOOSTER LOADING

Standard	6.2 kW
Alternative	2.1 kW

TOTAL LOADING

Standard	6.8 kW 3 x 16 A
Alternative	3.3 kW 16 A
Wash pump	0.5 kW 350 l/min
Rack size	500 x 500 mm
Loading height	425 (370) mm**
Noise level	60.5 dB (A)
Weight (gross / net)	70 / 60 kg

* Thermostop guarantees required temperatures with cold water and / or 230 V connection, the actual cycle times extend accordingly. For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT. To avoid spots and streaks on the wash ware, we recommend the usage of a demineralisation cartridge (HYDROLINE STAR / STAR EXTRA) or a reverse osmosis system HYDROLINE PURE.

** Machines with TOP-DRY are restricted in the left rear corner

PRODUCT ADVANTAGES

- **TOP-DRY:** integrated drying technology - no need for manual drying
- **VAPOSTOP²:** integrated steam condensation allows door opening without steam cloud. Also no steam escape during the condensation phase
- **VISIOTRONIC-TOUCH control:** colour touch screen (displays text and graphic) in conjunction with single-button control and remaining cycle time indication
- **WASHSMART app:** controlling your warewash operation with smart technology: status and messages, usage and operating costs, hygiene, service and consumables order
- **SENSO-ACTIVE resource management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result
- **CLIP-IN wash and rinse arms:** wash and rinse arms can be removed with one hand and without any tools
- **Intelligent data documentation:** automatic recording of important operational data and consumptions and indication on the display
- **USB-interface:** comfortable download of operational data in form of a protocol via USB
- **GENIUS-X² fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35%
- **Cold rinsing:** the rinse can be switched from hot to cold water so that you get cooler glasses without any loss of time
- **Intensive programme:** intensive rinse cycle to wash glasses with critical design with raised fresh-water amount
- **Interlocked strainer:** prevents operation without tank strainer
- **Optional refill signal:** monitors contents of external as well as integrated chemical containers
- **Hygiene programme:** for removal of calcium carbonate and other deposits from wash chamber